

# USAGE CHART PER SQUARE METER ACCORDING TO TILE FORMAT

*(The amount has a merely indicative value and it is at the sole discretion of the tile installer)*

### CHART 1

Side A (cm)	Side B (cm)	quantity per square meter
30	30	11
33	33	9
40	40	6
45	45	5
50	50	4
60	60	3

Recommended

### CHART 2

Side A (cm)	Side B (cm)	quantity per square meter
30	30	44
33	33	37
40	40	25
45	45	20
50	50	16
60	60	11
75	75	7
80	80	6
90	90	5
100	100	4

Recommended

### CHART 3

Side A (cm)	Side B (cm)	X-shaped clip	linear clip
50	50	4	8
60	60	3	6
75	75	2	4

Recommended

### CHART 4

Side A (cm)	Side B (cm)	X-shaped clip	linear clip
60	60	3	11
75	75	2	7
80	80	2	6
90	90	1	5
100	100	1	4

Recommended

### CHART 5

Side A (cm)	Side B (cm)	T-shaped clip
10	60	33
15	60	22
30	60	11
10	80	25
15	80	17
20	80	13

Recommended

### CHART 6

Side A (cm)	Side B (cm)	T-shaped clip	linear clip
10	80	25	13
15	80	17	8
20	80	13	6
10	90	22	11
15	90	15	7
20	90	11	6
45	90	5	2
10	100	20	10
15	100	13	7
20	100	10	5

Recommended

### CHART 7

Side A (cm)	Side B (cm)	T-shaped clip	linear clip
10	100	20	20
15	100	13	13
20	100	10	10
10	120	17	17
15	120	11	11
20	120	8	8
40	120	4	4
60	120	3	3

Recommended

### CHART 8

Side A (cm)	Side B (cm)	T-shaped clip	linear clip
10	120	17	25
15	120	11	17
20	120	8	13
40	120	4	6
60	120	3	4
20	150	7	10
20	180	6	8
30	180	4	6
40	180	3	4


Recommended



# S.A.P.

## the tile leveling systems

### that simplify tile installation

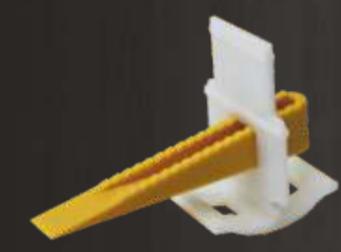

S.A.P.2



S.A.P.3



S.A.P.4



Save your time  
 Improve your results  
 Eliminate costly call backs



www.andalsystem.it



info@andalsystem.it www.andalsystem.it - Infoline: 0039 (0)962 431436

RECOMMENDED BY

## WHAT ARE THE TILE LEVELING SYSTEMS?


The tile leveling systems are tile installation systems for floor tiles and wall tiles of big rectified formats, created to face the market's demand that, more and more, requires big rectified tiles.

### WHERE TO USE

Thin tiles (Kerlite, Slimtech)  
Rectified floor tiles  
Rectified wall tiles  
Large-format tiles

### WHY TO USE

For a perfect tile-to-tile leveling  
Prevents tile from moving during the installation  
Virtually eliminates lippage  
No more gaps from shrinkage between tiles  
Decreases callbacks due to poor installation

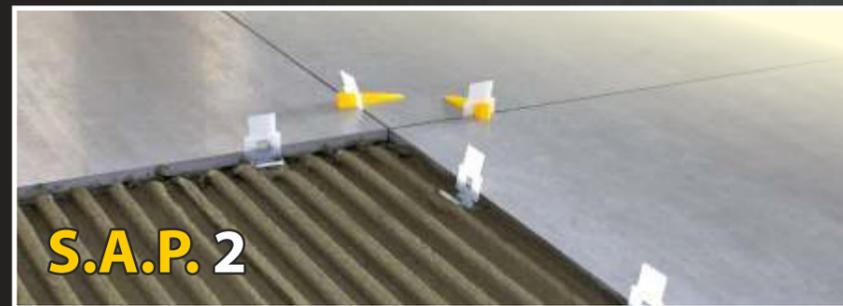

**S.A.P. 2**

- 100% nylon
- Aligns tiles of different thickness
- Allows to install also with no regular ground
- Allows to install tiles from 8 to 12 mm of thickness
- Clip available for 2 mm of grout joint



**S.A.P. 3**

- Clip compatible with other Tile Levelling Systems
- Longer wedge than other Tile Levelling Systems to work better with low thick tiles
- Thinner base of the clip to slide better into the mortar
- Allows to install tiles from 0 to 12 mm and from 13 to 20 mm of thickness
- Clips available for 1 or 2 mm of grout joint




0 - 12 mm 1 mm  
0 - 12 mm 2 mm  
13 - 20 mm 2 mm



**S.A.P. 4**

**NEW  
GROUT  
JOINT  
1mm**

- Clip compatible with other Tile Levelling Systems
- Unique Tile Levelling System able to automatically screw and unscrew the cap
- Speed removal of the Cap
- Thinner base of the clip to slide better into the mortar
- Allows to install tiles from 0 to 20 mm of thickness
- Clip available for 1 and 2 mm of grout joint
- Three clip formats:
  - linear
  - T-shaped
  - cross

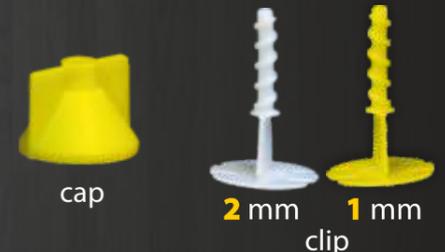

### HOW TO USE

Slide two clips under the tile and into the mortar. According to the tile size, add more clips on each side of the tile.  
Place the second tile.  
Place the cap on the clip in order to screw it automatically.  
Tighten it until the tiles are perfectly aligned.  
**No special removal tools are required!**  
Once the mortar is set, simply kicks the clips in the same direction as the grout joints and it will break off at the base.  
The cap will automatically unscrew and will be reused for your next projects.

**Installation  
2 TIMES  
FASTER**  
CUSTOMERS SATISFIED  
**100%  
GUARANTEED**

### HOW TO USE

Slide two clips under the tile and into the mortar approximately 2" from each end of the tile. According to the tile size, add more clips on each side of the tile.  
Place the second tile.  
Slide the reusable wedges into the hole at the top of the clip, pushing it as tight as possible. To facilitate this operation, use the optional traction-adjustable pliers. Check for the alignment of the grout joints and move on to the next tile.  
**No special removal tools are required!**  
Once the mortar is set, simply kicks the clips in the same direction as the grout joints and it will break off at the base.  
Go through and pick up all the wedges, which are reusable several times.  
For your next project, you will only need to purchase more clips.



**S.A.P. 2**

**S.A.P. 3**

**S.A.P. 4**